Temposonics
AN AMPHENOL COMPANY

Data Sheet

ER CANopen

Magnetostrictive Linear Position Sensors

- Compact sensor model
- Operating temperature up to +75 °C (+167 °F)
- Ideal for flexible mounting

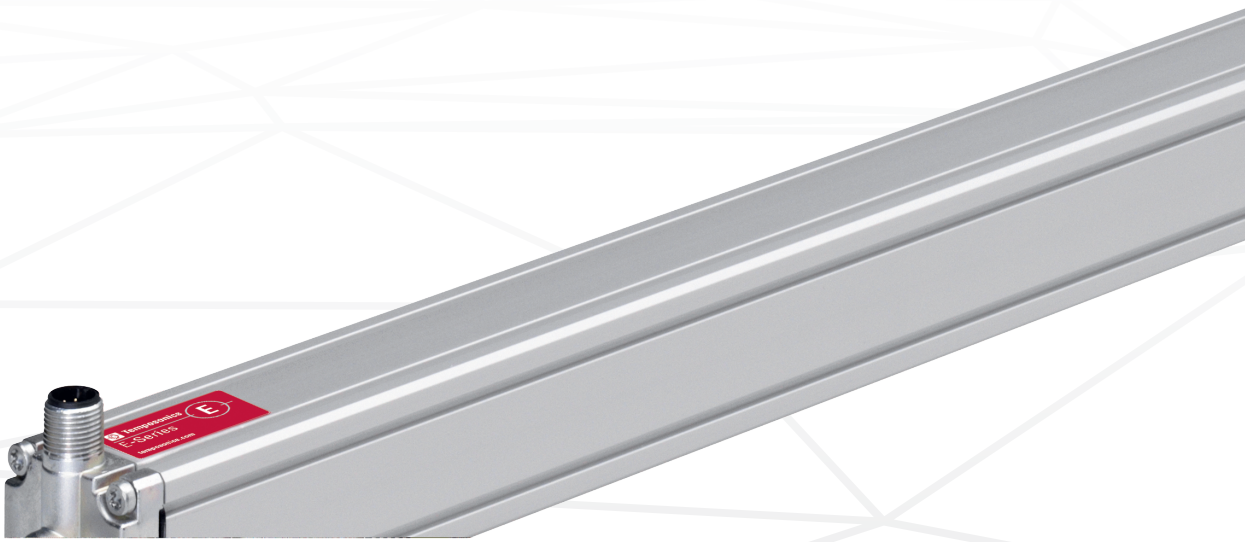

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

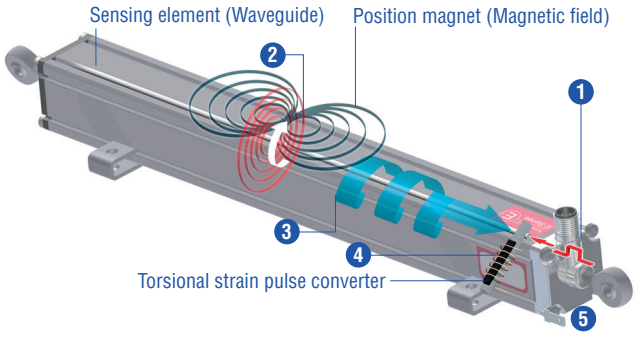

Measurement Cycle

1	Current pulse generates magnetic field
2	Interaction with position magnet field generates torsional strain pulse
3	Torsional strain pulse propagates
4	Strain pulse detected by converter
5	Time-of-flight converted into position

Fig. 1: Time-of-flight based magnetostrictive position sensing principle

ER SENSOR

Robust, non-contact and wear free, the Temposonics linear position sensors provide the best durability and precise position measurement feedback in harsh industrial environments. Measurement accuracy is tightly controlled by the quality of the waveguide manufactured exclusively by Temposonics.

The Temposonics® ER has an aluminum rod-and-cylinder design where the rod can extend and retract from the sensor housing to measure linear position. Inside, a magnet is secured to the end of the rod and remains protected within the sensor electronics housing. Accessory rod ends are available for attaching the rod to the machine's moving part. The rod-and-cylinder sensor design can be installed in any orientation, and provides a convenient and versatile position feedback solution. Typical fields of applications are printing and paper industry, machine tools and plastics industry as well as control systems.

Fig. 2: Typical application: Paper industry

TECHNICAL DATA

Output	
Interface	CAN System ISO 11898
Data protocol	CANopen: CiA Standard DS 301 V3.0 / Encoder Profile DS 406 V3.1
Baud rate, kBit/s Cable length, m	1000 | 800 | 500 | 250 | 125 < 25 | < 50 | < 100 | < 250 | < 500 The sensor will be supplied with ordered baud rate, changeable by customer via LSS
Measured value	Position
Measurement parameters	
Resolution	10 µm oder 20 µm
Cycle time	1 ms
Linearity	≤ ±0.02 % F.S. (minimum ±60 µm)
Repeatability	≤ ±0.005 % F.S. (minimum ±20 µm)
Operating conditions	
Operating temperature	–40…+75 °C (–40…+167 °F)
Humidity	90 % relative humidity, no condensation
Ingress protection [1,2]	IP67 (connectors correctly fitted)
Shock test	100 g (single shock) IEC standard 60068-2-27
Vibration test	5 g / 10…2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The sensor meets the requirements of the EC directives and is marked with CE.
Magnet movement velocity	≤ 5 m/s
Design / Material	
Sensor electronics housing	Aluminum
Guided driving rod	Aluminum
Stroke length	50…1500 mm (2…60 in.)
Mechanical mounting	
Mounting position	Any
Mounting instruction	Please consult the technical drawings and the brief instructions (document number: _____
Electrical connection	
Connection type	M12 (5 pin) male connector
Operating voltage	+24 VDC (–15 / +20 %); UL recognition requires an approved power supply with energy limitation (UL 61010-1), or Class 2 rating according to the National Electrical Code (USA) / Canadian Electrical Code.
Ripple	≤ 0.28 V_{pp}
Current consumption	40…60 mA (depending on stroke length)
Dielectric strength	500 VDC (DC ground to machine ground)
Polarity protection	Up to –30 VDC
Overvoltage protection	Up to 36 VDC

1/ The IP rating is not part of the UL recognition.
2/ The IP rating IP67 is only valid for the sensor electronics housing, as water and dust can get inside the profile.

TECHNICAL DRAWING



CONNECTOR WIRING

FREQUENTLY ORDERED ACCESSORIES – Additional options available in our Accessories Guide 551444

Rod end	Mounting clamp
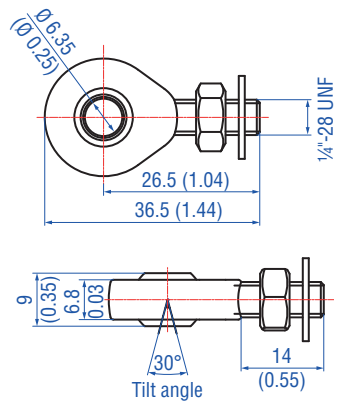	
Rod end with ¼"-28 UNF thread **Part no. 254 235**	**Mounting clamp** **Part no. 403 508**
Material: Galvanized steel	Material: Stainless steel 1.4301 / 1.4305 (AISI 304 / 303)

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
E	R							D	3	4	1	C						1
a		b	c					d			e	f				g	h	i

a Sensor model

E R	Aluminum cylinder with a guided driving rod

b Design

M	Inside thread M6 at end of rod (For metric stroke length measurement)
S	Inside thread ¼"-28 UNF at end of rod (For US customary stroke length measurement)

c Stroke length

X X X X M	0050…1500 mm

Standard stroke length (mm)*	Ordering steps
50 … 500 mm	25 mm
500…1500 mm	50 mm

X X X X U	002.0…060.0 in.

Standard stroke length (in.)*	Ordering steps
2…22 in.	1.0 in.
22…60 in.	2.0 in.

d Connection type

D 3 4	M12 (5 pin) male connector

e Operating voltage

1	+24 VDC (–15 / +20 %)

f Output

C 3 0 4	CANopen
C 4 0 4	CANopen (bus terminator)

g Baud rate

1	1000 kBit/s
2	500 kBit/s
3	250 kBit/s
4	125 kBit/s

h Resolution

4	10 µm
5	20 µm

i Type

1	Standard

DELIVERY

- Sensor

Select mounting accessories regarding your application:

- 1 or 2 rod ends M6 / ¼“-28 UNF or / and
- 2 mounting clamps up to 1250 mm (50 in.) stroke length, 3 mounting clamps for 1500 mm (60 in.) stroke length

Accessories have to be ordered separately.

Manuals, Software & 3D models available at:
www.temposonics.com

*/ Non standard stroke lengths are available; must be encoded in 5 mm / 0.1 in. increments.
Some preferred stroke lengths may be available with faster lead time. Contact MTS Sensors for details.

Temposonics
AN AMPHENOL COMPANY

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 21 83 05 86
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 2415 1000 / 2415 1001
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
551341 Revision B (EN) 07/2019

UK CA CE ISO 9001 CERTIFIED

CANopen certified
CiA201202-301V402/20-0151

c UL us

temposonics.com

© 2021 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at **www.temposonics.com/trademarkownership**.